

foodclean

WASH GUNS, HOSES & WASH DOWN ACCESSORIES

MARKET LEADING EQUIPMENT
SPECIFICALLY DESIGNED &
DEVELOPED FOR FOOD
MANUFACTURERS



GUARD | 170

WASH GUNS, HOSES & WASH DOWN ACCESSORIES



CONTENTS

HIGH PRESSURE

Wash Guns	05
Lances & Nozzles	06
Spray Bar System	09
Drain Cleaning	09
Quick Release Couplings	10
Wash Down Hoses	11

MEDIUM PRESSURE

Wash Guns	13
Lances & Nozzles	15
Water Fed Brushes	16
Spray Bar System	17
Drain Cleaning	17
Quick Release Couplings	18
Wash Down Hoses	19

LOW

Wash Guns	22
Quick Release Couplings	24
Wash Down Hoses	24

FITTINGS & ADAPTERS

High Pressure Valves	25
High Pressure Connectors	25
Stainless Steel Compression Fittings	25
High Pressure - Clamps	26
Medium Pressure	26
Low Pressure	27

HIGH PRESSURE

WASH GUNS, HOSES & ACCESSORIES

The high-pressure cleaning process, which relies on powerful sprays to effectively remove tough dirt, grime and stubborn stains, demands equipment that can withstand the extreme wear and tear that comes with its use.


To alleviate the strain caused by high-pressure systems on equipment, our high-pressure products are crafted with heavy-duty materials, superior build quality, and innovative features designed to not only withstand the rigours of heavy use but also enhance user comfort and mitigate the risk of repetitive strain injuries (RSI).

ENQUIRE ABOUT OUR SERVICE OPTIONS TO **MINIMISE WASTE** & **MAXIMISE BUDGETS**

STRONGHOLD® 2500



THE RECOMMENDED HIGH PRESSURE SET UP

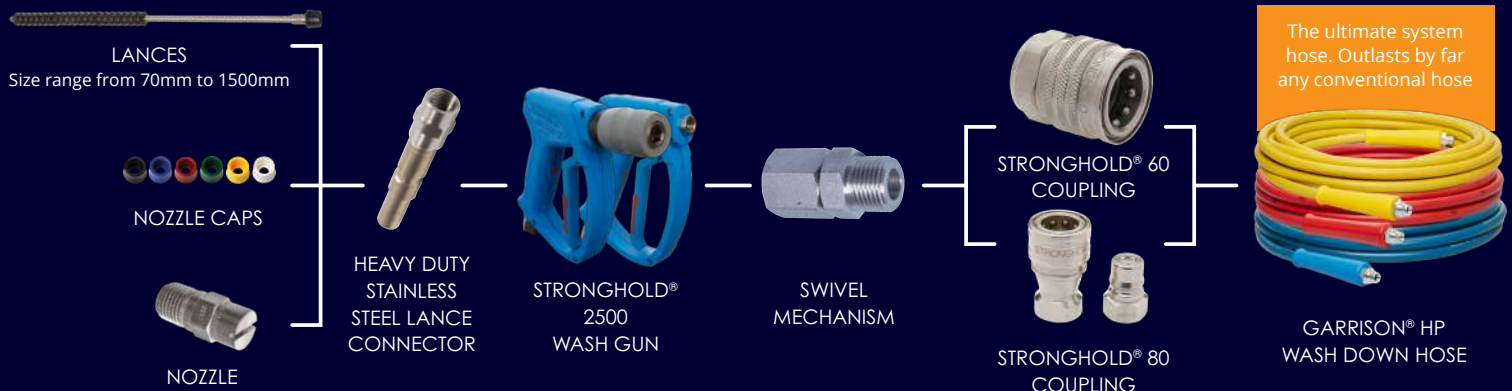

QUICK RELEASE OUTLET



ST2700 QUICK
RELEASE WASH GUN
STAINLESS STEEL
0128



WEIGHT



PRESSURE



TEMPERATURE
RATING



ST 2600 WASH GUN
0126



WEIGHT



PRESSURE



TEMPERATURE
RATING



BASE RANGE QUICK
RELEASE WASH GUN

Swivel Inlet 0152

Fixed Inlet 0153



WEIGHT



PRESSURE



TEMPERATURE
RATING

FIXED OUTLET



STANDARD
WASH GUN
0101



WEIGHT



PRESSURE



TEMPERATURE
RATING



ST2600 WASH GUN
0125



WEIGHT



PRESSURE



TEMPERATURE
RATING



ST2700WASH GUN
0127



WEIGHT



PRESSURE



TEMPERATURE
RATING



ST2000 WASH GUN
0102



WEIGHT



PRESSURE



TEMPERATURE
RATING



SWIVEL WASH GUN
0107



WEIGHT



PRESSURE



TEMPERATURE
RATING



ALLOWS THE
GUN TO FREELY
TURN ON
THE HOSE

SWIVEL MECHANISM
3/8" M-Fm Swivel 8050

COLOUR CODED MULTI PRESSURE LANCES



50% PRESSURE LANCES

150mm - Blue 0228

600mm - Blue 0229

1500mm - Blue 0230




70% PRESSURE LANCES

150mm - Yellow 0231

600mm - Yellow 0232

1000mm - Yellow 0233

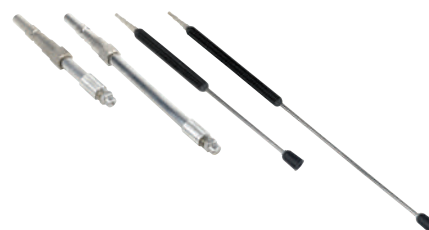

FULL PRESSURE STAINLESS STEEL
QUICK RELEASE LANCES


70mm 0241

150mm 0234

600mm 0235

1000mm 0236

HIGH PRESSURE WASH GUNS AND LANCES

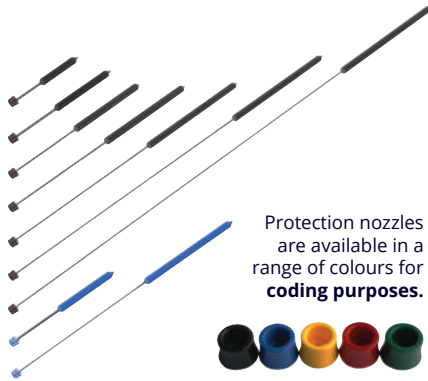

Protection nozzles are available in a range of colours for coding purposes.

STAINLESS STEEL FIXED LANCE

70mm	0221
150mm	0218
300mm	0217
500mm - Black Range	0215
600mm - Black Range	0213
800mm - Black Range	0212
900mm - Black Range	0210
1000mm - Black Range	0216
1500mm - Black Range	0203
250mm - Blue Range	0244
500mm - Blue Range	0243
1000mm - Blue Range	0225

*Nozzle not included, please specify requirements



DOUBLE LANCES

500mm	0220
1000mm	0206
Double Lance - Short	0237



PLEASE NOTE

The lance is not supplied with a nozzle, please specify nozzle size required.

STAINLESS STEEL FLEXI LANCE

600mm Blue	0290
------------	------



PLEASE NOTE

The lance is not supplied with a nozzle, please specify nozzle size required.

ADJUSTABLE ANGLE LANCE

800mm	0246
-------	------

REDUCE THE PROBABILITY OF JAMMED LANCES AND CRACKED CONNECTORS

HEAVY DUTY STAINLESS STEEL LANCE CONNECTOR

0627



STANDARD LANCE CONNECTOR

0618



MEDIUM PRESSURE MODEL AVAILABLE ON PAGE 16

FLOOR CLEANING TOOL

0224



USE IN CONJUNCTION WITH THE TECHNIJEKTOR® INJECTORS

STAINLESS STEEL FOAM LANCES

300mm	0701
300mm - With Connector	0700
600mm	0710
600mm - With Connector	0711

5.4m & 7.4m LENGTH VERSIONS ARE AVAILABLE CONTACT THE TEAM FOR MORE INFORMATION

THE EASILY ADJUSTABLE TELESCOPIC LANCE HAS A LIGHTWEIGHT FIBREGLASS & ALUMINIUM CONSTRUCTION MAKING IT IDEAL FOR REACHING AWKWARD AREAS.



TELESCOPIC LANCE

0247



PRESSURE



TEMPERATURE RATING



WEIGHT

ALLOWS THE
RINSE PRESSURE
TO BE LOWERED
OR RAISED BY
TURNING THE
PLASTIC

1/4" FM
OUTLET



SEE NOZZLE FLOW
AND PRESSURE
CHART BELOW

1/4" M
INLET



1/4" FM
INLET & OUTLET

HIGH PRESSURE STAINLESS STEEL
NOZZLES
0301

VARIO PRESSURE NOZZLE
0357

PRESSURE REDUCING NOZZLE
0303

NOZZLE FLOW AND PRESSURE CHART

Angles available: 00°, 15°, 25°, 40° and 65°. Sizes available are indicated down the left column on the table below.
Nozzle number is then made up by pre-fixing nozzle size with desired angle. Flow rates shown are in litres per minute.

	Low Pressure				Medium Pressure						High Pressure					
Nozzle Size	Pressure (Bar)															
	4	5	6	7	10	20	25	30	35	40	50	60	70	100	150	200
02	.91	1.0	1.1	1.2	1.4	2.0	2.3	2.5	2.7	2.9	3.2	3.5	3.8	4.6	5.6	6.4
03	1.4	1.5	1.7	1.8	2.2	3.1	3.4	3.7	4.0	4.3	4.8	5.3	5.7	6.8	8.4	9.7
04	1.8	2.0	2.2	2.4	2.9	4.1	4.6	5.0	5.4	5.8	6.4	7.1	7.66	9.1	11.2	12.9
045	2.1	2.3	2.5	2.7	3.2	4.6	5.1	5.6	6.1	6.5	7.3	7.9	8.6	10.3	12.6	14.5
05	2.3	2.5	2.8	3.0	3.6	5.1	5.7	6.2	6.7	7.2	8.1	8.8	9.5	11.4	14.0	16.1
055	2.5	2.8	3.1	3.3	4.0	5.6	6.3	6.9	7.4	7.9	8.9	9.7	10.5	12.5	15.4	17.7
06	2.7	3.1	3.3	3.6	4.3	6.1	6.8	7.5	8.1	8.6	9.7	10.6	11.4	13.7	16.7	19.3
065	3	3.3	3.6	3.9	4.7	6.6	7.4	8.0	8.7	9.4	10.5	11.5	12.4	14.7	18.1	21
07	3.2	3.6	3.9	4.2	5.0	7.1	8.0	8.7	9.4	10.1	11.3	12.4	13.3	16.0	19.5	23
075	3.4	3.8	4.2	4.5	5.4	7.6	8.3	9.4	10.1	10.8	12.1	13.2	14.3	17.1	21	24
08	3.6	4.1	4.5	4.8	5.8	8.2	9.1	10.0	10.8	11.5	12.9	14.1	15.3	18.2	22	26
085	3.9	4.3	4.7	5.1	6.1	8.7	9.7	10.0	11.5	12.3	13.7	15.0	16.2	19.4	24	27
09	4.1	4.6	5.0	5.4	6.5	9.2	10.3	11.2	12.1	13.0	14.5	15.9	17.2	21	25	29
10	4.6	5.1	5.6	6.0	7.2	10.2	11.4	12.5	13.5	14.4	16.1	17.7	19.1	23	28	32
11	5.0	5.6	6.1	6.6	7.9	11.2	12.5	13.7	14.8	15.9	17.7	19.4	21	25	31	35
12	5.5	6.1	6.7	7.2	8.6	12.2	13.7	15.0	16.2	17.3	19.3	21	23	27	33	39
15	6.8	7.6	8.4	9.0	10.8	15.3	17.1	18.7	20	22	24	26	29	34	42	48
20	9.1	10.2	11.2	12.1	14.4	20	23	25	27	29	32	35	38	46	56	64
25	11.4	12.7	14	15.1	18	25	28	31	34	36	40	44	48	57	70	81
30	13.7	15.3	16.7	18.1	22	31	34	37	40	43	48	53	57	68	84	97
35	-	-	-	-	-	36	40	44	47	50	56	62	67	80	98	113
40	18.2	20	22	24	29	41	46	50	54	58	64	71	76	91	112	129
50	23	25	28	30	36	51	57	62	67	72	81	88	95	114	140	161
60	27	31	33	36	43	61	68	75	81	86	97	106	114	137	167	193


HIGH PRESSURE

Lances and Nozzles

Foodclean spray bars can achieve the optimum clean for your conveyor belt. **Belts can be cleaned using far less labour and water and you will soon reap the benefits!** These spray bars are made from stainless steel and are built in modular form with stands and brackets designed specially to make setup as quick and easy as possible.

HIGH PRESSURE SPRAY BAR SYSTEMS

Spray Bar Stand	1900
Spray Bar Clamp - Single	1901
Spray Bar Clamp - Double	1902
400mm Spray Bar 4 Nozzles	1903H
600mm Spray Bar 6 Nozzles	1904H
800mm Spray Bar 8 Nozzles	1905H
1000mm Spray Bar 10 Nozzles	1906H
Pressure Gauge	1910H
Spray Bar Splitter	1911H

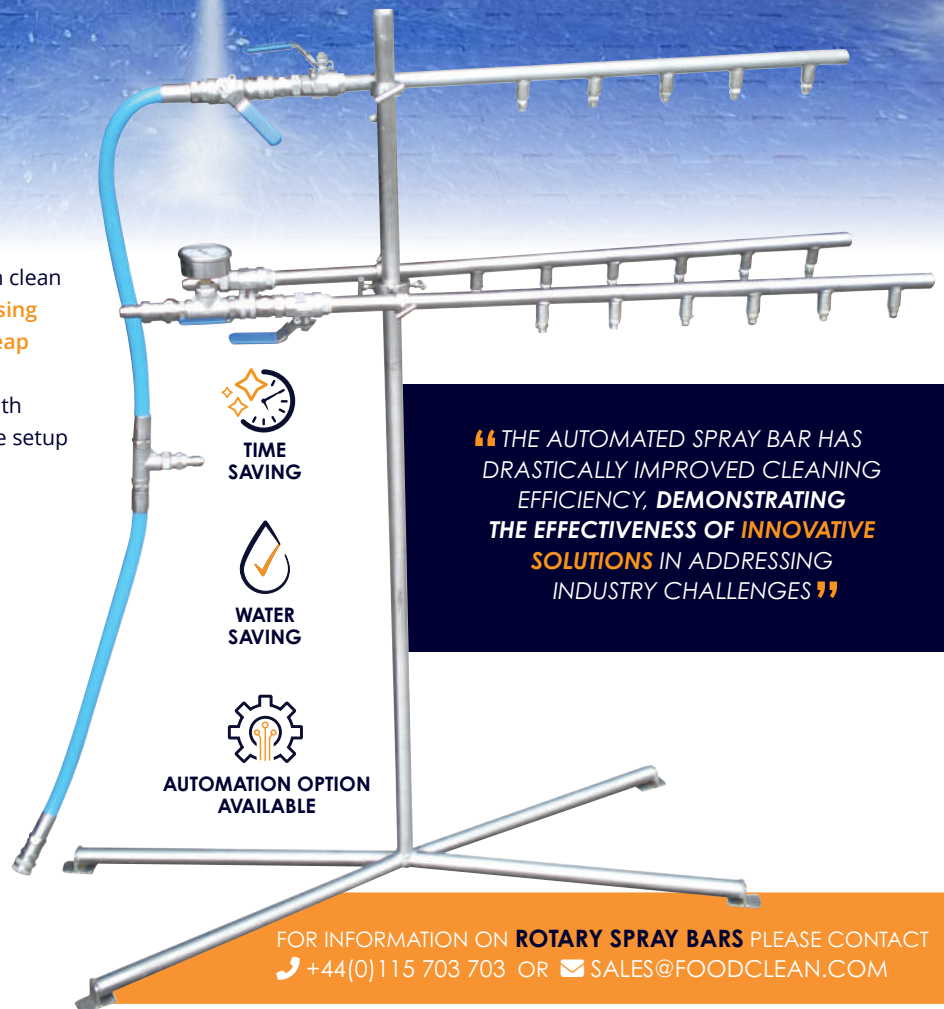

DRAIN CLEANING

ROTARY DRAIN CLEANING NOZZLES

Size 05 1/4" FM BSP	0345
Size 06 1/4" FM BSP	0346
Size 08 1/4" FM BSP	0347
Size 09 1/4" FM BSP	0348


RETROJET DRAIN CLEANING NOZZLES

Size 05 3/8" FM BSP	0302
Size 06 3/8" FM BSP	0321
Size 07 3/8" FM BSP	0322
Size 08 3/8" FM BSP	0323
Size 10 3/8" FM BSP	0324
Size 15 3/8" FM BSP	0325

DRAIN CLEANING HOSE

20m 1/4" Drain Hose	0450
25m 1/4" Drain Hose	0451
30m 1/4" Drain Hose	0452
40m 1/4" Drain Hose	0453
100m 1/4" Drain Hose	0454

Retrojet Drain Cleaning Nozzle



Rotary Drain Cleaning Nozzle





STRONGHOLD® 60 COUPLING

3/8" Brass	0615
3/8" Stainless Steel	1620



STRONGHOLD® 60 PLUG

3/8" Mild Steel	0616
3/8" Stainless Steel	1621



The Stronghold® 60 range of couplings and plugs are made to the TEMA style quick release coupling, used as industry standard on all leading high pressure cleaning systems.

TECHNICAL DETAILS:

- Max System Pressure: 350 Bar
- Max System Temperature: 90°C Rated
 - Burst Pressure: 1200 Bar
- Rated temperature range: -30°C- 100°C
 - Material: 316 Stainless Steel, Mild Steel or Passivated Brass



QUICK RELEASE COUPLINGS
INCORPORATE A SHUT OFF VALVE
WHICH CLOSSES WHEN THE COUPLING
IS RELEASED FROM THE PLUG.

STRONGHOLD® 80 COUPLINGS


3/8" Stainless Steel Coupling	0619
1/4" Stainless Steel Coupling	0671
1/2" Stainless Steel Coupling	0673
3/4" Stainless Steel Coupling	0675
3/8" Stainless Steel Plug	0620
1/4" Stainless Steel Plug	0672
1/2" Stainless Steel Plug	0674
3/4" Stainless Steel Plug	0676

QUICK RELEASE COUPLING



BASE RANGE COUPLING

Base Range Coupling - Brass	6006
Base Range Coupling - Stainless Steel	6008
Base Range Plug - Brass	6007
Base Range Plug - Stainless Steel	6009

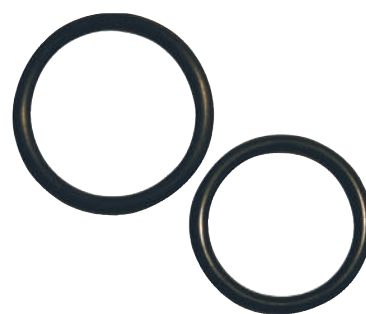

O RINGS

Large Tema O Rings (Pack of 10)	8000
Small Tema O Rings (Pack of 10)	8001
Large Viton Tema O Rings (Pack of 10)	8005
Small Viton Tema O Rings (Pack of 10)	8006
O Rings 22mm (Pack of 10)	8002



M22 SCREW COUPLINGS

3/8" M - 22mm	0601
1/4" M - 22mm	0602
3/8" FM - 22mm	0603
1/4" FM - 22mm	0604



M22 ADAPTORS

3/8" M - 22mm	0605
1/4" M - 22mm	0606
3/8" FM - 22mm	0608
1/4" FM - 22mm	0608
M22-M22 Adaptor	0609

HIGH PRESSURE

Spray Bar, Drain Cleaning and Couplings

THIS HOSE HAS BEEN DESIGNED SPECIFICALLY FOR FOOD FACTORY SYSTEMS. THE **TOUGH OUTER COVER** RESISTS ATTACK FROM CHEMICALS, ANIMAL FATS AND ABRASION AND SO THE COVER STAYS INTACT AND DOES NOT PEEL AWAY.

“THE GARRISON HIGH PRESSURE HOSE HAS LIVED UP TO EXPECTATIONS... BREAKAGE HAS REDUCED CONSIDERABLY, WHERE I WOULD CHANGE THE HOSE THREE TIMES A YEAR. WE HAVE NOT CHANGED THE GARRISON HOSE YET.”



GARRISON® HIGH PRESSURE WASH DOWN HOSE

	Blue	Red	Yellow
10m 3/8"	0391	0856	0495
15m 3/8"	0392	0857	0496
20m 3/8"	0393	0858	0497
25m 3/8"	0394	0859	0498
30m 3/8"	0395	0860	0499
40m 3/8"	0396	0861	0541

GARRISON®

Technical Details:

- 0.42 kg/ metre
- -29°C to +121°C temperature rating
- 310 bar (4:1 safety factor)



ULTRAWASH® 2 WIRE WASH DOWN HOSE

	Blue	Red
10m 3/8"	0414	0908
15m 3/8"	0415	0909
20m 3/8"	0416	0910
25m 3/8"	0417	0911
30m 3/8"	0418	0912
40m 3/8"	0419	0913

400 BAR
MAX

PRESSURE

-40°C -
+121°C

TEMPERATURE
RATING

0.5kg

WEIGHT
PER METRE



ECOWASH 2 WIRE WASH DOWN HOSE

	Blue	Red
10m 3/8"	0420	0914
15m 3/8"	0421	0915
20m 3/8"	0422	0916
25m 3/8"	0423	0917
30m 3/8"	0424	0918
40m 3/8"	0425	0919

400 BAR
MAX

PRESSURE

150°C
MAX

TEMPERATURE
RATING

0.6kg

WEIGHT
PER METRE

MEDIUM PRESSURE

WASH GUNS, HOSES
& ACCESSORIES



Lowering the water pressure for cleaning to medium pressure has many benefits compared to low and high pressure.

FEATURES:

Improves operator safety reducing operator fatigue and strain injuries caused by the kick back in high pressure guns.

Improves cleaning efficiency not only does medium pressure save labour and water but, overall, is a faster clean due to the spray impact being retained over a much greater distance.

Reduce environmental impact as medium pressure reduces water usage, labour and energy, overall, a medium pressure system can be up to 80% more eco-friendly compared to low and high pressure systems.

ENQUIRE ABOUT OUR SERVICE OPTIONS TO **MINIMISE WASTE** & **MAXIMISE BUDGETS**

MEDIUM PRESSURE

Wash Guns



TECHNICAL DETAILS:

- 1/2" Female BSP inlet
- Max Temperature: 100°C
- Max Pressure: 60 bar
- Weight: 0.69kg

STRONGHOLD® 450 WASH GUN - QUICK RELEASE OUTLET


Blue	Red	Yellow	Green
0196	0197	0200	0201

STRONGHOLD® 450 WASH GUN - FIXED OUTLET

Blue	Red	Yellow	Green
0198	0199	0191	0192

SPARE PARTS AVAILABLE

THE RECOMMENDED MEDIUM PRESSURE SET UP

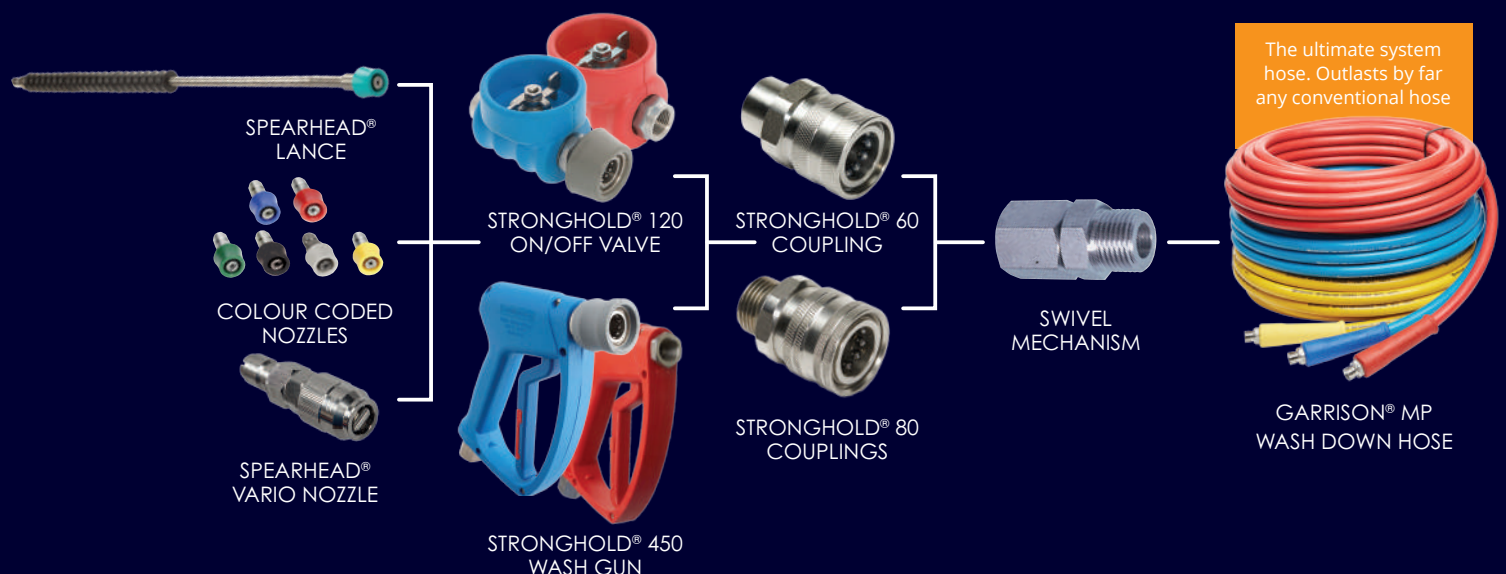

STRONGHOLD® 120

HEAVY DUTY ON/OFF
VALVE FOR MEDIUM
PRESSURE



PRESSURE



TEMPERATURE



FDA APPROVED
OUTER CASING

STRONGHOLD® 120 ON/OFF
VALVE - QUICK RELEASE OUTLET

Blue 5113
Red 6113



WEIGHT

STRONGHOLD® 120 ON/OFF
VALVE - FIXED OUTLET

Blue 5111
Red 6111



WEIGHT

RUBBER ENCASED ON/OFF VALVE



WEIGHT

WITHOUT
COUPLING
0111



WEIGHT

WITH
COUPLING
0113



ON/OFF VALVE WITH PROTECTOR CAGE



WEIGHT

WITHOUT
COUPLING
0133



WEIGHT

WITH
COUPLING
0134



WASH GUNS



WEIGHT

RL60 WASH GUN
0106

SWIVEL MECHANISM



ALLOWS GUN TO **TURN**
FREELY ON HOSE

1/2" M-Fm Swivel
0118

ADJUSTABLE ANGLE
LANCE
0246-1530



Supplied with a 15 degree,
size 30 nozzle as standard

MEDIUM PRESSURE

Wash Guns, Valves, Lances & Nozzles



Spearhead® nozzles and lances are fitted with high impact jets which use the water more accurately.



Works perfectly with the
STRONGHOLD® 120 ON/OFF VALVE
OR STRONGHOLD® 450 WASH GUN



SPEARHEAD® NOZZLE

Size 15 - Water Saving	0248
Size 20 - Water Saving	0249
Size 25	0250
Size 30	0251
Size 40	0252

600MM SPEARHEAD® LANCE

Size 15 - Water Saving	0258
Size 20 - Water Saving	0259
Size 25	0260
Size 30	0261
Size 40	0262

250MM SPEARHEAD® LANCE

Size 15 - Water Saving	0253
Size 20 - Water Saving	0254
Size 25	0255
Size 30	0256
Size 40	0257



150MM COLOURED CODED LANCES

150mm Lance - Black	0378
150mm Lance - Yellow	0367
150mm Lance - Green	0368
150mm Lance - Blue	0369
150mm Lance - Red	0370



250MM ANGLED COLOURED CODED LANCES

250mm Lance - Black	0269
250mm Lance - Yellow	0336
250mm Lance - Green	0337
250mm Lance - Blue	0338
250mm Lance - Red	0339



FOR
FOAMING
NOZZLES SEE
PAGE 16

SHORT COLOURED CODED NOZZLES - RINSE & SANITISE

Short Nozzle - Black	0299
Short Nozzle - White	0270
Short Nozzle - Yellow	0310
Short Nozzle - Green	0311
Short Nozzle - Blue	0312
Short Nozzle - Red	0314



600MM ANGLED COLOURED CODED LANCES

600mm Nozzle - Black	0268
600mm Nozzle - Yellow	0317
600mm Nozzle - Green	0318
600mm Nozzle - Blue	0319
600mm Nozzle - Red	0315

1000MM ANGLED COLOURED CODED LANCES

1000mm Nozzle - Black	0375
1000mm Nozzle - Yellow	0371
1000mm Nozzle - Green	0372
1000mm Nozzle - Blue	0373
1000mm Nozzle - Red	0374



PERFECT FOR THOSE
HARD TO REACH AREAS

TAKE NOTE Please specify which spray type is required i.e. fan spray, straight jet, or wide angle spray for sanitising.



WATER
SAVING



THIS PRODUCT IS WATER SAVING
ADJUSTABLE ANGLE NOZZLE
DESIGNED TO **SAVE LABOUR,**
WATER AND HELP TO **REDUCE THE**
LOSS OF TRADITIONAL NOZZLES.

SPEARHEAD®
VARIO NOZZLE

0342



PRESSURE



WHITE FOAM
NOZZLE
0313



LONG THROW
FOAM NOZZLE
0379TC



STAINLESS STEEL
FOAM LANCE
300MM
0320



AVAILABLE IN:

- BLUE
- WHITE
- RED
- GREEN
- YELLOW

WATER FED TELESCOPE
BRUSHES

Blue	0358
White	0360
Red	0359
Green	0361
Yellow	0362



LOCKABLE
VERSION
ALSO
AVAILABLE

HYGIENIC STORAGE
FOR **UP TO 4**
NOZZLES OR LANCES



STAINLESS STEEL
NOZZLE RACK
0340

HIGH PRESSURE
MODEL AVAILABLE
ON PAGE 7



FLOOR
CLEANING TOOL
0242



WATER FED HAND
BRUSHES

Blue	0349
White	0352


MEDIUM PRESSURE

Lances, Nozzles , Water Fed Brushes & Spray Bars

Using Foodclean spray bars, you can achieve the optimum clean for your conveyor belt. **Belts can be cleaned using far less labour and water and you will soon reap the benefits!** These spray bars are made from stainless steel and are built in modular form with stands and brackets designed specially to make setup as quick and easy as possible.

MEDIUM PRESSURE SPRAY BAR SYSTEMS

Spray Bar Stand	1900
Spray Bar Clamp - Single	1901
Spray Bar Clamp - Double	1902
Spray Bars - 400mm 4 Nozzles	1903M
Spray Bars - 600mm 6 Nozzles	1904M
Spray Bars - 800mm 8 Nozzles	1905M
Spray Bars - 1000mm 10 Nozzles	1906M
Pressure Gauge	1910M

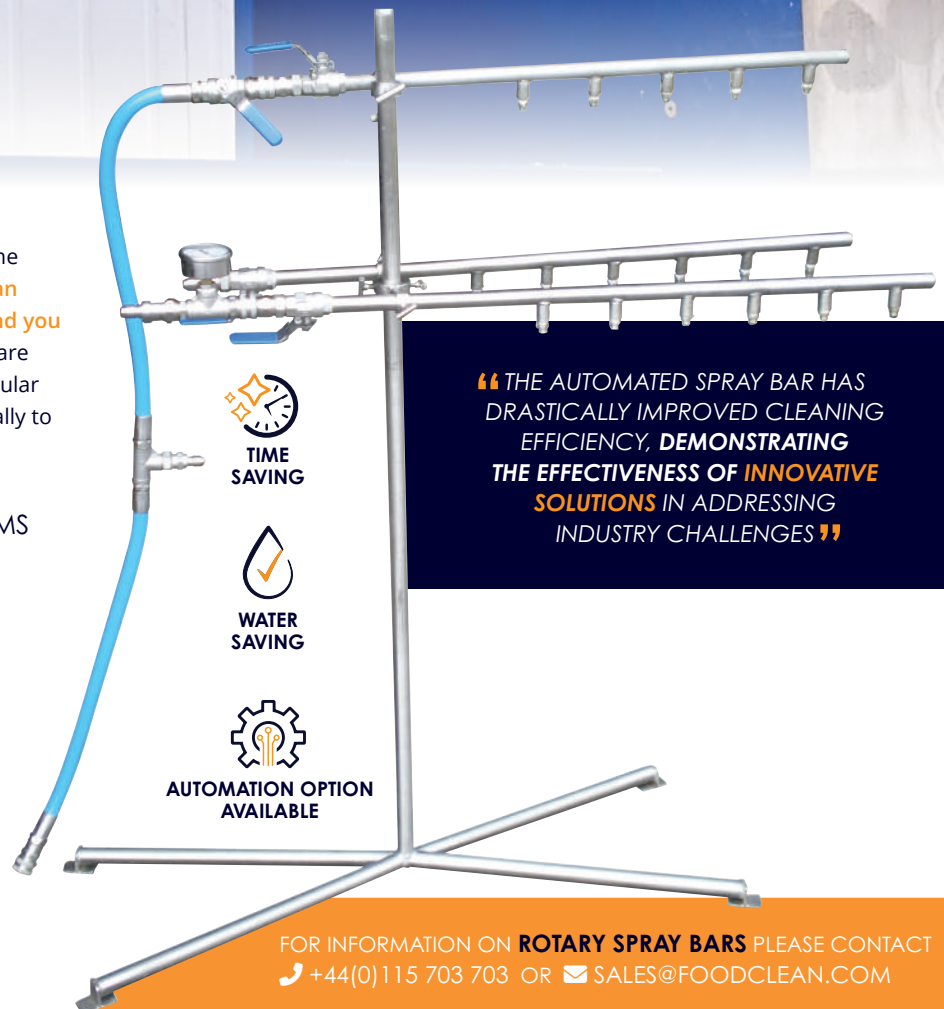

FOR INFORMATION ON **ROTARY SPRAY BARS** PLEASE CONTACT
☎ +44(0)115 703 703 OR ✉ SALES@FOODCLEAN.COM

DRAIN CLEANING KIT

Drain Cleaning Kit - 25mm	0813
Drain Cleaning Kit - 30mm	0814
Drain Cleaning Kit - 35mm	0815





Technical Details:

- Max System Pressure: 80 bar
- Max System Temperature: 90°C
- Rated Pressure: 248 bar
- Rated Temperature Range: -40°C - 121°C
- Material: 304 Stainless Steel



STRONGHOLD® 20 COUPLING
3/8" FM 1624



STRONGHOLD® 20 COUPLING
1/2" FM 1625



STRONGHOLD® 20 COUPLING
1/2" M 1626

QUICK RELEASE COUPLINGS



STRONGHOLD® 20 COUPLING
WITH SCREW SHROUD
1/2" M 1572
1/2" FM 1573



STRONGHOLD® 20 PLUGS


1/4" FM	1627
3/8" FM	1628
1/2" FM	1629
1/2" M	1576



O-RINGS

Large O Rings (Pack of 10)	8003
Small O Rings (Pack of 10)	8004

360° FREELY ROTATABLE FITTING

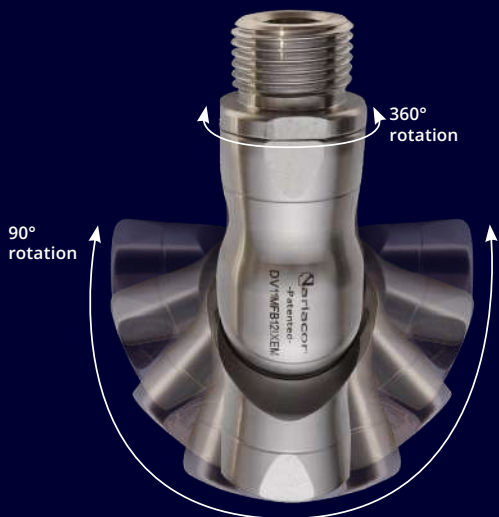

90°C
MAX

40 BAR
MAX

TEMPERATURE

PRESSURE

HIGHLIGHTS:

- **Economy** - No more premature wear and tear on the supply hose
- **Ease of Use** - Reduce effort due to hose rigidity and make it easier to wash in hard-to-reach places
- **Comfort** - No need to roll up the hose, which is now ideally positioned

360° FREELY ROTATABLE FITTING
8720




MEDIUM PRESSURE

Couplings & Wash Down Hoses



TECHNICAL DETAILS:

- 200 bar rated
- -40°C to +100°C temperature rating
- 0.30kg/ metre
- Internal hose diameter: 12.7mm (1/2")
- External hose diameter: 22.2mm
- Minimum bend radius: 70mm
- Complies to ISO 22196:2011 and AATCC 30:2017 (Test III - Agar Plate)



NYLON
BRAIDED



LIGHTWEIGHT

EVERY
GARRISON MP
HOSE COMES
WITH 1 YEAR
WARRANTY

GARRISON® MEDIUM PRESSURE WASH DOWN HOSE

	Blue	Red	Yellow
10m 1/2"	0961	0971	0981
15m 1/2"	0962	0972	0982
20m 1/2"	0963	0973	0983
25m 1/2"	0964	0974	0984
30m 1/2"	0965	0975	0985
40m 1/2"	0966	0976	0986



“THE GARRISON HOSE MIGHT SEEM EXPENSIVE, BUT THE DURABILITY MAKES UP FOR IT VERY WELL!

WE GOT ONE TWO YEARS AGO FOR THE LORRY WASH, WHERE IT GETS DRAGGED AROUND ON CONCRETE, AROUND CORNERS ETC. THE ORIGINAL HOSES LASTED AROUND 3 MONTHS, THE GARRISON HOSE IS STILL GOING STRONG AFTER 2 YEARS! ”

WE CUT HOSES TO SPECIFIED LENGTHS

GARRISON® 100 WASH DOWN HOSE


	Blue
10m 1/2"	0921
15m 1/2"	0922
20m 1/2"	0923
25m 1/2"	0924
30m 1/2"	0925
40m 1/2"	0926




TECHNICAL DETAILS:

- Pressure rating: 100 bar
- -30°C to +100°C temperature rating
- Textile braiding


This hose has been **specifically designed for food factory systems**. High tensile textile reinforced special high quality and flexible rubber hose, resists attack from chemicals, animal fats and abrasion & weathering.

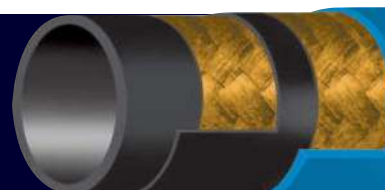

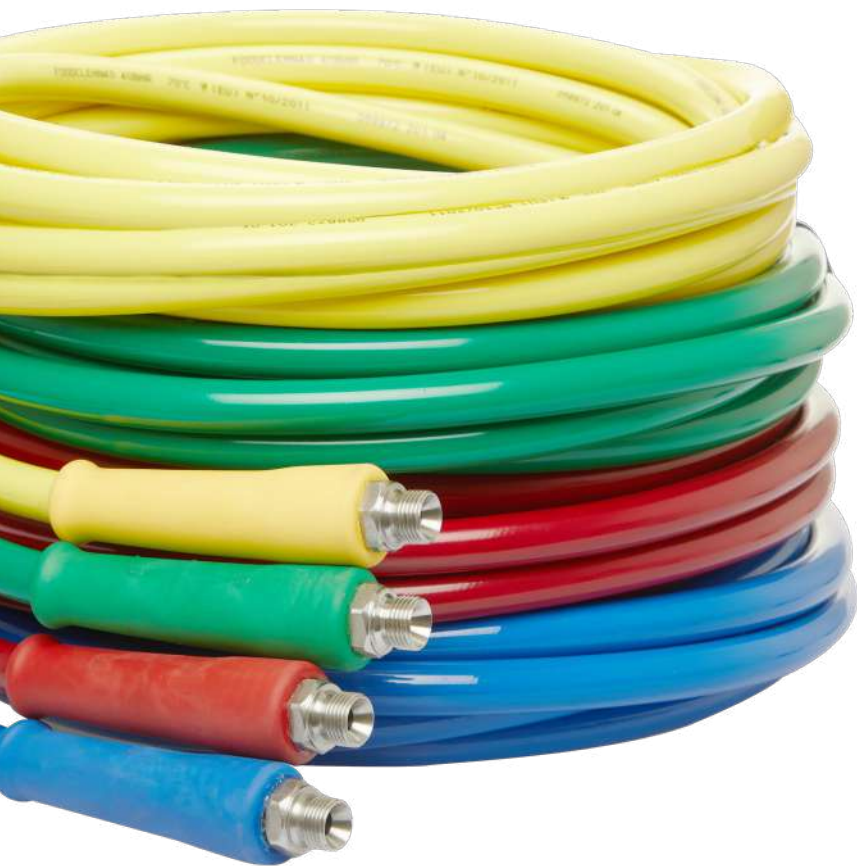

TECHNICAL DETAILS:

- +5°C to +70°C temperature rating
- Complies to 2007/19/CE and 10/2011/EU
- Weight: 0.329kg/ metre
- Outside diameter: 22.0mm
- Minimum bend radius: 84mm



PRESSURE



TEMPERATURE RATING



WEIGHT PER METRE



EU 10/2011

FOODCLEAN[®] 40 WASH DOWN HOSE

	Blue	Red	Yellow	Green
10m 1/2"	0500	0590	0509	0571
15m 1/2"	0501	0591	0512	0577
20m 1/2"	0502	0592	0513	0596
25m 1/2"	0503	0593	0514	0597
30m 1/2"	0504	0594	0515	0598
40m 1/2"	0505	0595	0544	0599

WASH DOWN HOSES





0.43kg

WEIGHT PER METRE

ULTRAWASH[®] 1 WIRE WASH DOWN HOSE

	Blue	Red
10m 1/2"	0530	0902
15m 1/2"	0531	0903
20m 1/2"	0532	0904
25m 1/2"	0533	0905
30m 1/2"	0534	0906
40m 1/2"	0542	0907



RATED PRESSURE



-40°C - +100°C

TEMPERATURE RATING



STEEL BRAIDED



ECONOWASH 1 WIRE WASH DOWN HOSE

	Blue
10m 1/2"	0475
15m 1/2"	0476
20m 1/2"	0477
25m 1/2"	0478
30m 1/2"	0479
40m 1/2"	0480



PRESSURE



+150°C MAX

TEMPERATURE RATING



STEEL BRAIDED



LOW PRESSURE

WASH GUNS, HOSES
& ACCESSORIES

Low pressure systems typically operate at pressures of 10 bar or less and run at the same pressure as the mains supply. To compensate for the limited pressure, it is often recommended that the water temperature be higher compared to medium and high-pressure systems.

Designed to tackle the challenges of high temperature from a low pressure system, our products boast innovative features that combat extreme heat, prioritise user comfort, and offer adjustable spray patterns for optimal cleaning performance.

ENQUIRE ABOUT OUR SERVICE OPTIONS TO **MINIMISE WASTE** & **MAXIMISE BUDGETS**


WATER
SAVING
BY 20%*

SPARE
PARTS
AVAILABLE

STRONGHOLD® 300



INSULATED
HANDLE
to keep
it cool

LIGHTWEIGHT
0.68kg

EASY TO
REPLACE NOZZLE
for seal replacements

FULL ADJUSTABLE
SPRAY PATTERNS
for effective cleaning

EASY HOLD
TRIGGER
Reduces user fatigue

TOUGH TRIGGER
GUARD
PREVENTS DAMAGE

HIGHLIGHTS:

- All wetted parts **constructed of stainless steel** longer lasting and improved hygiene
- **Insulated air gap in handle** – stays cool even when using hot water
- Precise **fully adjustable spray** patterns for effective cleaning

2 FLOW RATES
AVAILABLE

Standard Flow - water saving compared to regular water guns

High Flow - when a larger flow of water is required


0.7kg
WEIGHT


93°C
MAX
TEMPERATURE
RATING


50 BAR
MAX
PRESSURE

STRONGHOLD® 300 LOW/
MEDIUM PRESSURE WASH GUN -
STANDARD FLOW


Blue 0185
Red 0187

STRONGHOLD® 300 LOW/
MEDIUM PRESSURE
WASH GUN - HIGH FLOW

Blue 0186
Red 0188

*water saving for standard flow wash gun only

THE RECOMMENDED LOW PRESSURE SET UP

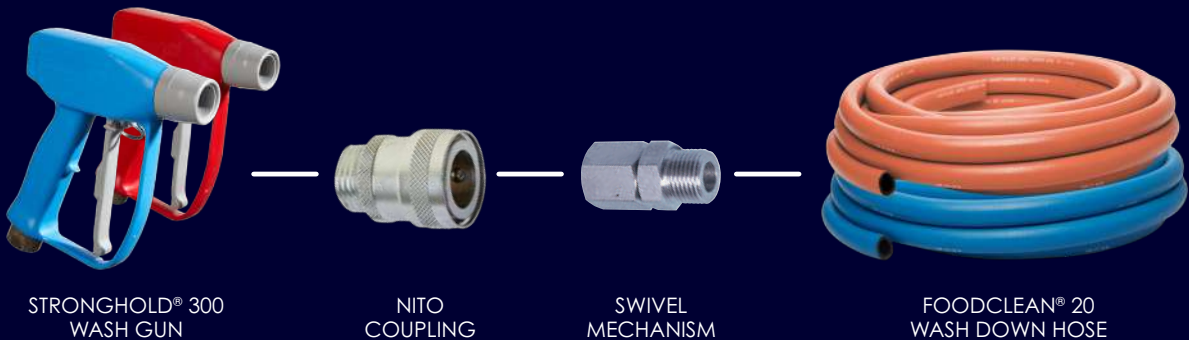

LOW PRESSURE

Wash Guns



0.76kg
WEIGHT

10
BAR
PRESSURE

93°C
MAX
TEMPERATURE
RATING

STRAHMAN WASH GUN

1/2" Swivel Hose Tail 0163
3/4" Swivel Hose Tail 0164



COMBATS RSI



0.8kg
WEIGHT

12
BAR
PRESSURE

50°C
MAX
TEMPERATURE
RATING

DINGA TYPE LIGHT WEIGHT
WASH GUN

0131



1.1kg
WEIGHT

24
BAR
PRESSURE

90°C
MAX
TEMPERATURE
RATING

RB65 WASH GUN

Blue 0143
Red 0173



1/2" FEMALE
INLET



0.76kg
WEIGHT

10
BAR
PRESSURE

93°C
MAX
TEMPERATURE
RATING

STRAHMAN MINI
PRO WASH GUN

0129



1kg
WEIGHT

24
BAR
PRESSURE

95°C
MAX
TEMPERATURE
RATING

DINGA TYPE WASH GUN

Blue 0149
Red 0171
Yellow 0136



0.45kg
WEIGHT

12
BAR
PRESSURE

80°C
MAX
TEMPERATURE
RATING

RB35 WASH GUN

Brass 0175
Stainless Steel 0175SS



0.2kg
WEIGHT

7
BAR
PRESSURE

50°C
MAX
TEMPERATURE
RATING

HUSKY WASH GUN

Green 0110
Red 0141



50°C
MAX
TEMPERATURE
RATING

1kg
WEIGHT

24
BAR
PRESSURE

DINGA TYPE WASH GUN
WITH TRIGGER GUARD

0116



100°C
MAX
TEMPERATURE
RATING

1.2kg
WEIGHT

14
BAR
PRESSURE

HOT WATER HEAVY
DUTY WASH GUN

High Flow Brass 0120
Standard Flow Brass 0121
Standard Flow Stainless Steel 0123



0.6kg
WEIGHT

25
BAR
PRESSURE

95°C
MAX
TEMPERATURE
RATING

MINI BRASS
WASH GUN

0170



95°C
MAX
TEMPERATURE
RATING

0.8kg
WEIGHT

24
BAR
PRESSURE

DINGA TYPE WASH GUN
STAINLESS STEEL

0150



80°C
MAX
TEMPERATURE
RATING





0.5kg
WEIGHT

16
BAR
PRESSURE

HEAVY DUTY TWIST
GRIP NOZZLE

Blue 0178
Red 0124

NITO COUPLINGS AND PLUGS

	Product Code	Size	Thread/Hose Tail
 Nito Coupling with Thread	0612	Coupling 1/2"	3/4" FM BSP Thread
	0613	Coupling 1/2"	1/2" FM BSP Thread
	0670	Coupling 1/2"	1/2" M BSP Thread
	0654	Coupling 3/4"	3/4" FM BSP Thread
 Nito Coupling with Hosetail	0655	Coupling 1/2"	1/2" Hosetail
	0656	Coupling 1/2"	3/4" Hosetail
	0657	Coupling 1/2"	3/4" Hosetail
 Nito Plug with Thread	0663	Plug 1/2"	1/2" FM BSP Thread
	0664	Plug 1/2"	3/4" FM BSP Thread
	0667	Plug 1/2"	1/2" M BSP Thread
	0668	Plug 1/2"	3/4" M BSP Thread
 Nito Plug with Hosetail	0659	Plug 1/2"	1/2" Hosetail
	0660	Plug 1/2"	3/4" Hosetail
	0614	Plug 1/2"	Stepped Hosetail
	0661	Plug 3/4"	1/2" Hosetail
	0662	Plug 3/4"	3/4" Hosetail



BOTH ARE AVAILABLE **BARE** OR **CRIMPED** WITH **STAINLESS STEEL PIPE**



FOODCLEAN® 20
WASH DOWN HOSE

	Blue	Red
1/2"	0550	0552
3/4"	0551	0553



Technical Details:

- Max Pressure: 20 bar, 300 psi
- Temperature Rating: -29°C to +88°C
- Minimum Bend Radius: 95mm
- Fabric braided construction
- Weight 1/2" 0.39kg/metre, 3/4" 0.63kg/metre

FOODCLEAN
STEAM HOSE

	Blue
1/2"	0510
3/4"	0511



Technical Details:

- Max Pressure: 20 bar
- Temperature Rating: -20°C to +90°C (water)
- Temperature Rating: +164°C (steam)
- NBR rubber material for both tube and cover

VALVES



400 BAR BALL VALVES
- STAINLESS STEEL

3/8" Stainless Steel HP Lever Valve	0639
1/2" Stainless Steel HP Lever Valve	0640
3/8" HP Pointer Handle	1656
1/2" HP Pointer Handle	1657



70 BAR BALL VALVES
- STAINLESS STEEL

1/4" Stainless Steel LP Ball Valve	1682
3/8" Stainless Steel LP Ball Valve	1683
1/2" Stainless Steel LP Ball Valve	1684
3/4" Stainless Steel LP Ball Valve	1685
1" Stainless Steel LP Ball Valve	1686

HIGH PRESSURE FITTINGS & ADAPTERS



ALTO TYPE BALL VALVE

Alto Type Lever Valve	1658
-----------------------	------

CONNECTORS

M - M HYDRAULIC CONNECTOR



MILD STEEL
ADAPTER

3/8" x 1/4"	0621
3/8" x 3/8"	0622
3/8" x 1/2"	0623
1/4" x 1/4"	0624
1/2" x 1/4"	0625
1/2" x 1/2"	0626

STAINLESS STEEL
ADAPTER

3/8" x 1/4"	0644
3/8" x 3/8"	0641
3/8" x 1/2"	0642
1/4" x 1/4"	0646
1/2" x 1/4"	0645
1/2" x 1/2"	0643

FM - FM HYDRAULIC
CONNECTOR



STAINLESS STEEL
ADAPTER

3/8" x 3/8"	0650
3/8" x 1/2"	0651
1/2" x 1/2"	0652

FM SOCKET



MILD STEEL

1/4"	1614
3/8"	1615
1/2"	1616
3/4"	1617

STAINLESS STEEL

1/4"	0695
3/8"	0696
1/2"	0697
3/4"	0698

COMPRESSION FITTINGS



STUD COUPLING

15mm Stud x 3/8" BSP	0635
15mm Stud x 1/2" BSP Thread	0631
22mm Stud 1/2" M BSP	1666



STRAIGHT CONNECTOR

15mm	0632
22mm	1664



EQUAL TEE

15mm	0634
22mm	1663



COMPRESSION
ELBOW

15mm	0633
22mm	1665

STAINLESS STEEL TUBING

15mm x 1.5mm 3m length	1661
22mm x 1.5mm 3m length	1662

CLAMPS



STANDARD CLAMP

Mild Steel - 15mm Tube	1667
Mild Steel - 22mm Tube	1668

CLAMP FOR BOLTING MOUNTING

Mild Steel - 15mm Tube	1669
Mild Steel - 22mm Tube	1670

STANDARD CLAMP STAINLESS STEEL

15mm Tube	1671
22mm Tube	1672

BOLT MOUNTING STAINLESS STEEL

15mm Tube	1673
22mm Tube	1674

MEDIUM PRESSURE FITTINGS & ADAPTERS

Fittings & Adapters



M-M STAINLESS STEEL ADAPTER

3/8" x 3/8"	9001
3/8" x 1/2"	9004
1/4" x 3/8"	9003
1/4" x 1/4"	9000
1/2" x 1/2"	9006

Q2 WATER LIMITERS

Union 1/2"	1872
Union 3/4"	1860

Q2 LIMITER NOZZLE

Q2 Limiter Nozzle (07)	1861
Q2 Limiter Nozzle (10)	1862
Q2 Limiter Nozzle (12)	1863
Q2 Limiter Nozzle (15)	1864
Q2 Limiter Nozzle (20)	1865
Q2 Limiter Nozzle (25)	1866
Q2 Limiter Nozzle (30)	1867
Q2 Limiter Nozzle (40)	1868
Q2 Limiter Nozzle (50)	1869

BONDED STEEL

MILD STEEL		STAINLESS STEEL	
1/4"	1646	1/4"	1650
3/8"	1647	3/8"	1651
1/2"	1648	1/2"	1652
3/4"	1649	3/4"	1653



FITTINGS & ADAPTERS

Valves, Connectors, Fittings & Clamps

LOW PRESSURE FITTINGS & ADAPTERS



STAINLESS STEEL O CLIP

10.8mm - 12.8mm	0578
12.0mm - 14mm	0579
13.0mm - 15.0mm	0580
14.6mm - 16.8mm	0581
15.3mm - 17.5mm	0582
17.9mm - 20.7mm	0583
19.9mm - 22.5mm	0584
22mm - 25mm	0585
23mm - 27mm	0586
27mm - 31mm	0587
31mm - 34mm	0588



STAINLESS STEEL JUBILEE CLIP

9.5mm - 12mm	0516
11mm - 16mm	0517
13mm - 20mm	0518
16mm - 22mm	0519
18mm - 25mm	0520
22mm - 30mm	0521
25mm - 35mm	0522
32mm - 45mm	0523



THREAD SEALANT

Thread Sealant 50ml	1697
50g Liquid PTFE Thread Sealant	8009



JUBILEE CLIP FLEXI
DRIVER
0524



PINCERS FOR O
CLIPS
0589

HOSETAIL ADAPTERS & FITTINGS



BSP HOSETAIL ADAPTER
STAINLESS STEEL

3/8" BSP x 1/4" 1618	1/2" BSP x 1/2" 1608
3/8" BSP x 1/2" 1606	1/2" BSP x 3/4" 1610
1/4" BSP x 1/4" 1612	3/4" BSP x 1/2" 1611
1/2" BSP x 1/4" 1619	3/4" BSP x 3/4" 1609



BSP HOSETAIL ADAPTER
BRASS

3/8" BSP x 1/4" 1634	1/2" BSP x 1/2" 1602
3/8" BSP x 1/2" 0699	1/2" BSP x 3/4" 1604
1/4" BSP x 1/4" 1633	3/4" BSP x 1/2" 1605
1/2" BSP x 1/4" 1635	3/4" BSP x 3/4" 1603



SWIVEL HOSETAIL
FITTING

1/2" x 1/2"	1644
1/2" x 3/4"	1645

foodclean

SUSTAINABLE FOOD HYGIENE



UK

+44(0) 1522 703 703 info@foodclean.com www.foodclean.com
Saxilby Enterprise Park, Skellingthorpe Road, Lincoln LN1 2LR



FRANCE

+33(0) 170 75 26 82 info@foodclean.fr www.foodclean.com/fr
PA Sevaillies, 3B Av. Thomas Edison, 35340 Liffré, France